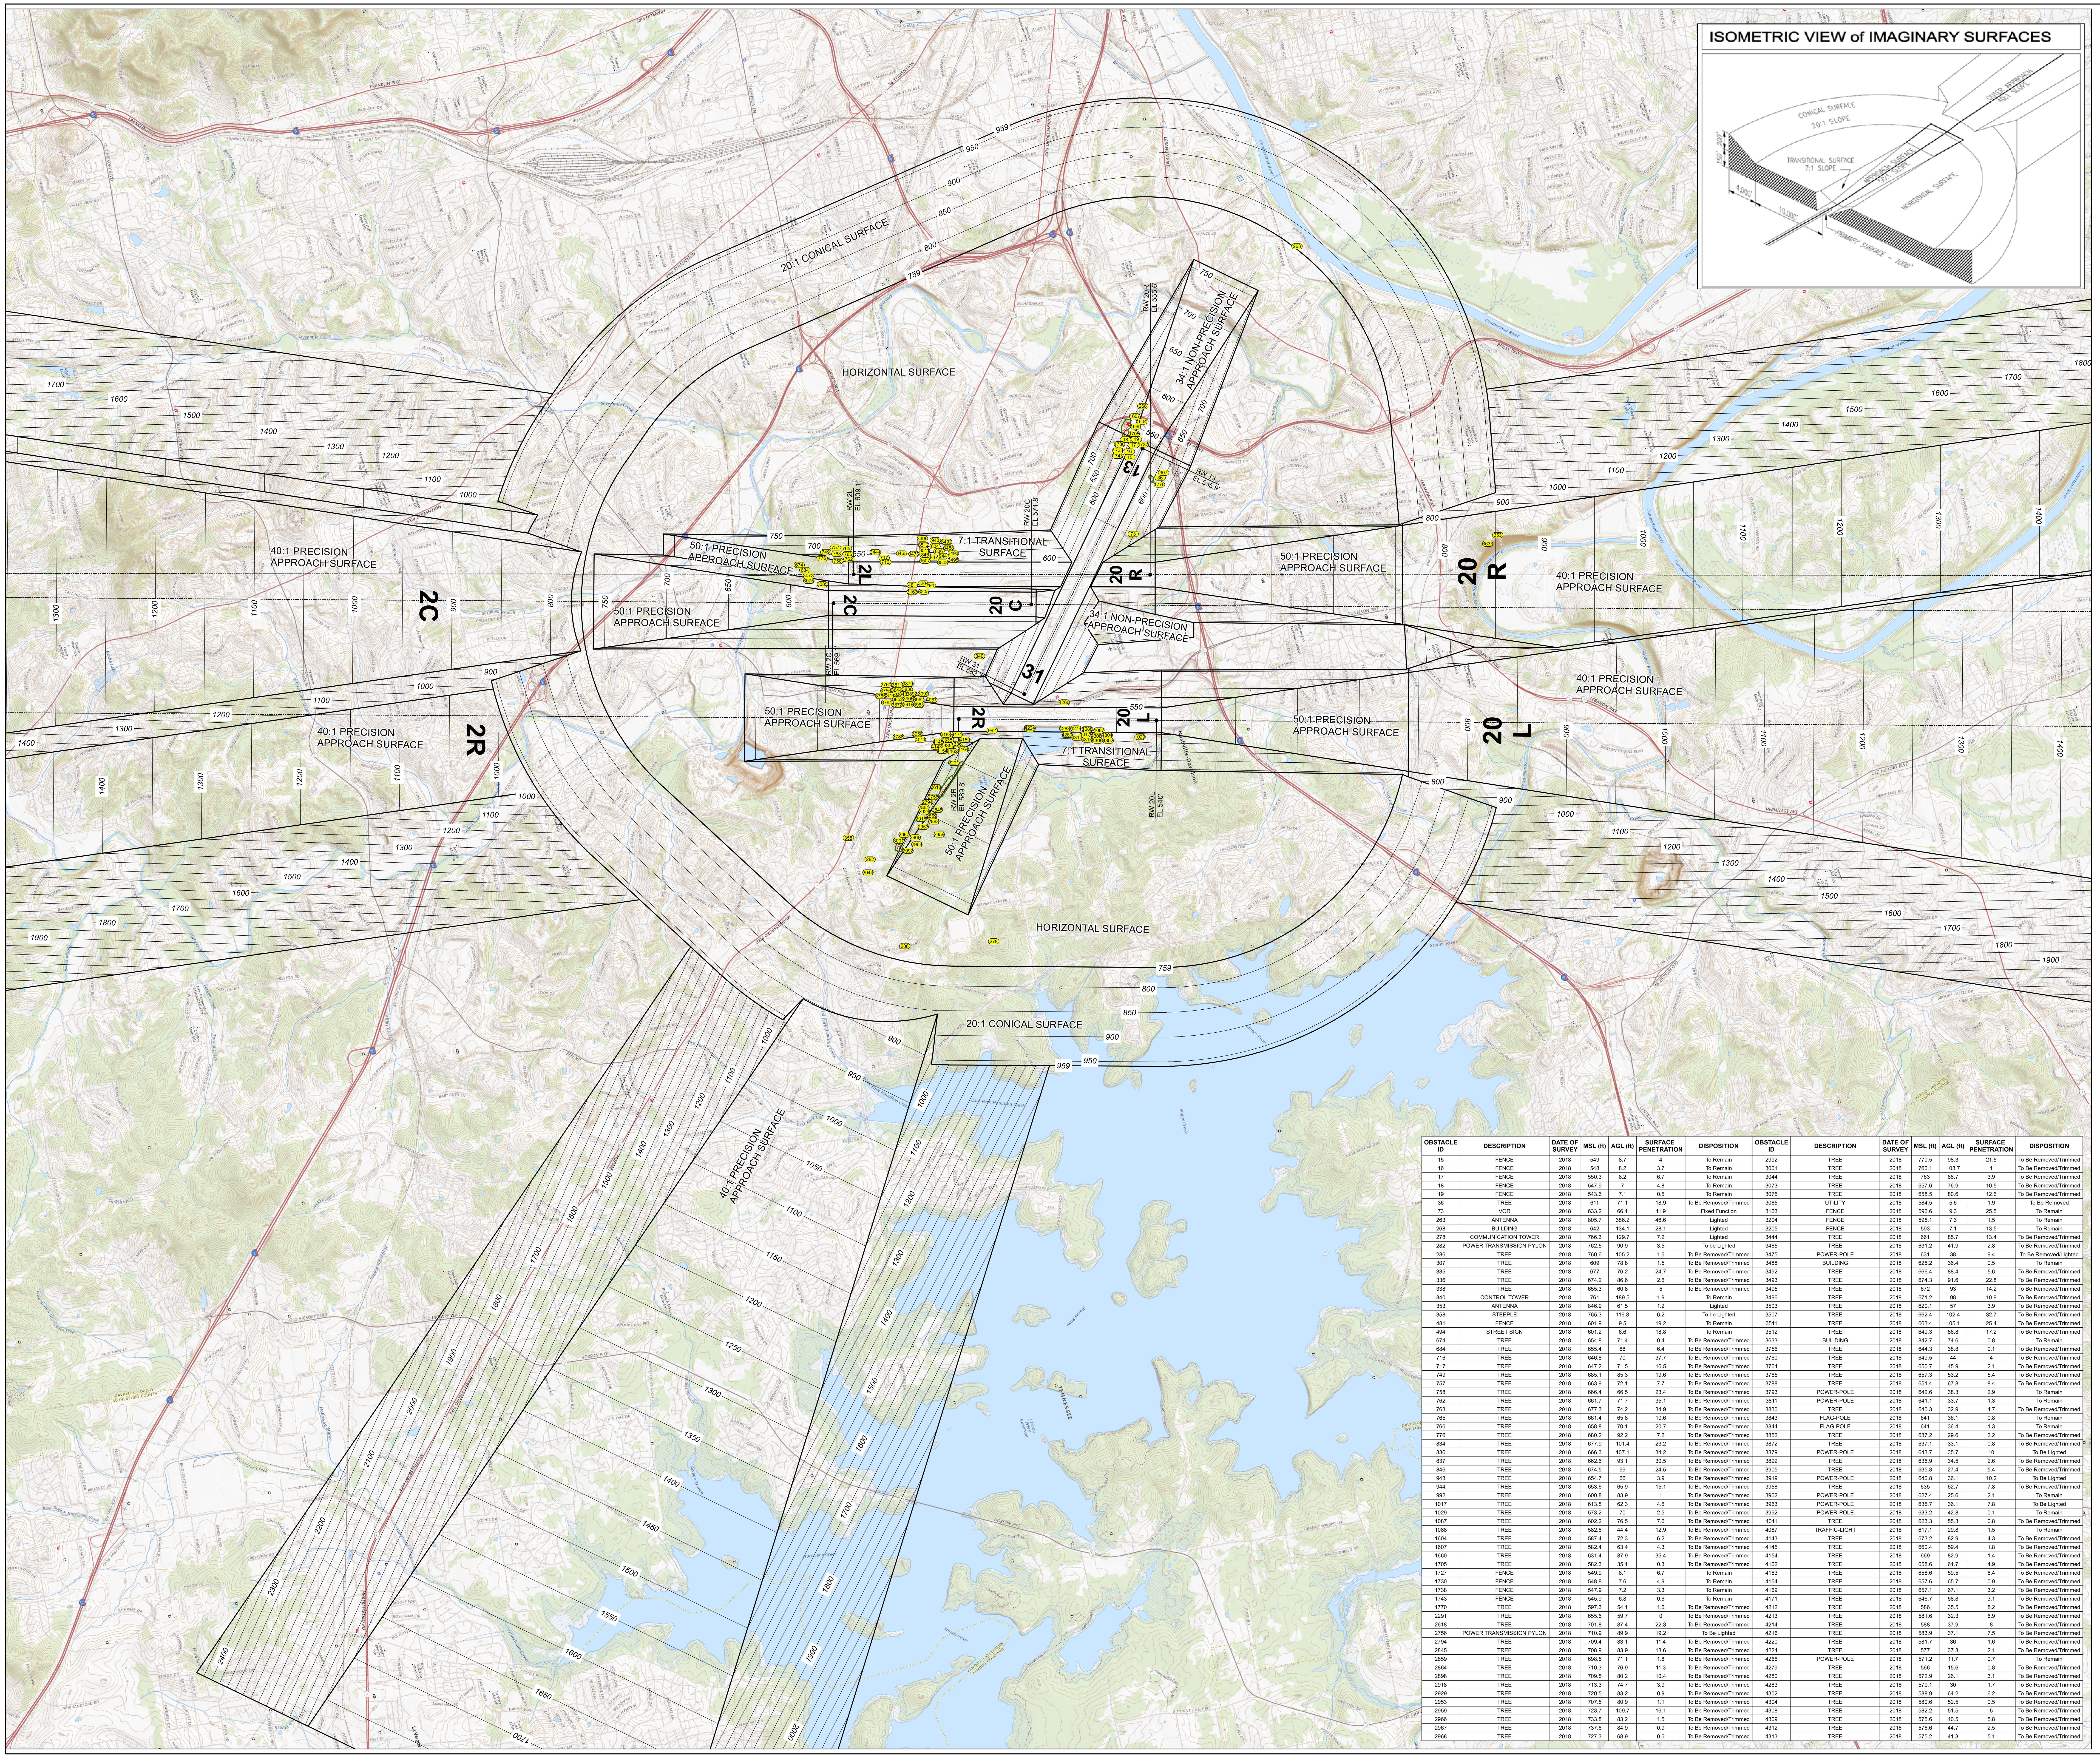

OBSTACLE ID	DESCRIPTION	DATE OF SURVEY	MSL (ft)	AGL (ft)	SURFACE PENETRATION	DISPOSITION	OBSTACLE ID	DESCRIPTION	DATE OF SURVEY	MSL (ft)	AGL (ft)	SURFACE PENETRATION	DISPOSITION
15	FENCE	2018	549	8.7	4	To Remain	2992	TREE	2018	770.5	98.3	21.5	To Be Removed/Trimmed
16	FENCE	2018	548	8.2	3.7	To Remain	3001	TREE	2018	760.1	103.7	1	To Be Removed/Trimmed
17	FENCE	2018	550.3	8.2	6.7	To Remain	3044	TREE	2018	763	88.7	3.9	To Be Removed/Trimmed
18	FENCE	2018	547.9	7	4.8	To Remain	3073	TREE	2018	657.6	76.9	10.5	To Be Removed/Trimmed
19	FENCE	2018	543.6	7.1	0.5	To Remain	3075	TREE	2018	658.5	80.6	12.6	To Be Removed/Trimmed
36	TREE	2018	611	71.1	18.9	To Be Removed/Trimmed	3085	UTILITY	2018	584.5	5.6	1.9	To Be Removed
73	VOR	2018	633.2	66.1	11.9	Fixed Function	3163	FENCE	2018	596.6	9.3	25.5	To Remain
263	ANTENNA	2018	805.7	386.2	46.6	Lighted	3204	FENCE	2018	595.1	7.3	1.5	To Remain
268	BUILDING	2018	642	134.1	28.1	Lighted	3205	FENCE	2018	593	7.1	13.5	To Remain
278	COMMUNICATION TOWER	2018	766.3	129.7	7.2	Lighted	3444	TREE	2018	661	85.7	13.4	To Be Removed/Trimmed
282	POWER TRANSMISSION PYLON	2018	762.5	90.9	3.5	To be Lighted	3465	TREE	2018	631.2	41.9	2.8	To Be Removed/Trimmed
286	TREE	2018	760.6	105.2	1.6	To Be Removed/Trimmed	3475	POWER-POLE	2018	631	38	9.4	To Be Removed/Lighted
307	TREE	2018	609	78.8	1.5	To Be Removed/Trimmed	3488	BUILDING	2018	626.2	36.4	0.5	To Remain
335	TREE	2018	677	76.2	24.7	To Be Removed/Trimmed	3492	TREE	2018	666.4	88.4	5.6	To Be Removed/Trimmed
336	TREE	2018	674.2	86.6	2.6	To Be Removed/Trimmed	3493	TREE	2018	674.3	91.6	22.8	To Be Removed/Trimmed
338	TREE	2018	655.3	60.8	5	To Be Removed/Trimmed	3495	TREE	2018	672	93	14.2	To Be Removed/Trimmed
340	CONTROL TOWER	2018	761	189.5	1.9	To Remain	3496	TREE	2018	671.2	98	10.9	To Be Removed/Trimmed
353	ANTENNA	2018	846.9	61.5	1.2	Lighted	3503	TREE	2018	620.1	57	3.9	To Be Removed/Trimmed
358	STEEPLE	2018	765.3	116.8	6.2	To be Lighted	3507	TREE	2018	662.4	102.4	32.7	To Be Removed/Trimmed
481	FENCE	2018	601.9	9.5	19.2	To Remain	3511	TREE	2018	663.4	105.1	25.4	To Be Removed/Trimmed
494	STREET SIGN	2018	601.2	6.6	18.8	To Remain	3512	TREE	2018	649.3	86.8	17.2	To Be Removed/Trimmed
674	TREE	2018	654.8	71.4	0.4	To Be Removed/Trimmed	3633	BUILDING	2018	842.7	74.6	0.8	To Remain
684	TREE	2018	655.4	88	6.4	To Be Removed/Trimmed	3756	TREE	2018	644.3	38.8	0.1	To Be Removed/Trimmed
716	TREE	2018	646.8	70	37.7	To Be Removed/Trimmed	3760	TREE	2018	649.5	44	4	To Be Removed/Trimmed
717	TREE	2018	647.2	71.5	16.5	To Be Removed/Trimmed	3764	TREE	2018	650.7	45.9	2.1	To Be Removed/Trimmed
749	TREE	2018	685.1	85.3	19.6	To Be Removed/Trimmed	3765	TREE	2018	657.3	53.2	5.4	To Be Removed/Trimmed
757	TREE	2018	663.9	72.1	7.7	To Be Removed/Trimmed	3788	TREE	2018	651.4	67.8	8.4	To Be Removed/Trimmed
758	TREE	2018	666.4	66.5	23.4	To Be Removed/Trimmed	3793	POWER-POLE	2018	642.6	38.3	2.9	To Remain
762	TREE	2018	661.7	71.7	35.1	To Be Removed/Trimmed	3811	POWER-POLE	2018	641.1	33.7	1.3	To Remain
763	TREE	2018	677.3	74.2	34.9	To Be Removed/Trimmed	3830	TREE	2018	640.3	32.9	4.7	To Be Removed/Trimmed
765	TREE	2018	661.4	65.8	10.6	To Be Removed/Trimmed	3843	FLAG-POLE	2018	641	36.1	0.8	To Remain
766	TREE	2018	658.8	70.1	20.7	To Be Removed/Trimmed	3844	FLAG-POLE	2018	641	36.4	1.3	To Remain
776	TREE	2018	680.2	92.2	7.2	To Be Removed/Trimmed	3852	TREE	2018	637.2	29.6	2.2	To Be Removed/Trimmed
834	TREE	2018	677.9	101.4	23.2	To Be Removed/Trimmed	3872	TREE	2018	637.1	33.1	0.8	To Be Removed/Trimmed
836	TREE	2018	666.3	107.1	34.2	To Be Removed/Trimmed	3879	POWER-POLE	2018	643.7	35.7	10	To Be Lighted
837	TREE	2018	662.6	93.1	30.5	To Be Removed/Trimmed	3892	TREE	2018	636.9	34.5	2.6	To Be Removed/Trimmed
846	TREE	2018	674.5	99	24.5	To Be Removed/Trimmed	3905	TREE	2018	635.8	27.4	5.4	To Be Removed/Trimmed
943	TREE	2018	654.7	66	3.9	To Be Removed/Trimmed	3919	POWER-POLE	2018	640.8	36.1	10.2	To Be Lighted
944	TREE	2018	653.6	65.9	15.1	To Be Removed/Trimmed	3958	TREE	2018	635	62.7	7.8	To Be Removed/Trimmed
992	TREE	2018	600.8	83.9	1	To Be Removed/Trimmed	3962	POWER-POLE	2018	627.4	25.6	2.1	To Remain
1017	TREE	2018	613.8	62.3	4.6	To Be Removed/Trimmed	3963	POWER-POLE	2018	635.7	36.1	7.8	To Be Lighted
1029	TREE	2018	573.2	70	2.5	To Be Removed/Trimmed	3992	POWER-POLE	2018	633.2	42.8	0.1	To Remain
1087	TREE	2018	602.2	76.5	7.6	To Be Removed/Trimmed	4011	TREE	2018	623.3	55.3	0.8	To Be Removed/Trimmed
1088	TREE	2018	582.6	44.4	12.9	To Be Removed/Trimmed	4087	TRAFFIC-LIGHT	2018	617.1	29.8	1.5	To Remain
1604	TREE	2018	587.4	72.3	6.2	To Be Removed/Trimmed	4143	TREE	2018	673.2	82.9	4.3	To Be Removed/Trimmed
1607	TREE	2018	582.4	63.4	4.3	To Be Removed/Trimmed	4145	TREE	2018	660.4	59.4	1.8	To Be Removed/Trimmed
1660	TREE	2018	631.4	87.9	35.4	To Be Removed/Trimmed	4154	TREE	2018	669	82.9	1.4	To Be Removed/Trimmed
1705	TREE	2018	582.3	35.1	0.3	To Be Removed/Trimmed	4162	TREE	2018	658.6	61.7	4.9	To Be Removed/Trimmed
1727	FENCE	2018	549.9	8.1	6.7	To Remain	4163	TREE	2018	658.6	59.5	8.4	To Be Removed/Trimmed
1730	FENCE	2018	548.8	7.6	4.9	To Remain	4164	TREE	2018	657.6	65.7	0.9	To Be Removed/Trimmed
1738	FENCE	2018	547.9	7.2	3.3	To Remain	4169	TREE	2018	657.1	67.1	3.2	To Be Removed/Trimmed
1743	FENCE	2018	545.9	6.8	0.6	To Remain	4171	TREE	2018	646.7	58.8	3.1	To Be Removed/Trimmed
1770	TREE	2018	597.3	54.1	1.6	To Be Removed/Trimmed	4212	TREE	2018	586	35.5	8.2	To Be Removed/Trimmed
2291	TREE	2018	655.6	59.7	0	To Be Removed/Trimmed	4213	TREE	2018	581.6	32.3	6.9	To Be Removed/Trimmed
2618	TREE	2018	701.8	87.4	22.3	To Be Removed/Trimmed	4214	TREE	2018	588	37.9	8	To Be Removed/Trimmed
2756	POWER TRANSMISSION PYLON	2018	710.9	89.9	19.2	To Be Lighted	4216	TREE	2018	583.9	37.1	7.5	To Be Removed/Trimmed
2794	TREE	2018	709.4	83.1	11.4	To Be Removed/Trimmed	4220	TREE	2018	581.7	36	1.6	To Be Removed/Trimmed
2845	TREE	2018	708.9	83.9	13.6	To Be Removed/Trimmed	4224	TREE	2018	577	37.3	2.1	To Be Removed/Trimmed
2859	TREE	2018	698.5	71.1	1.8	To Be Removed/Trimmed	4266	POWER-POLE	2018	571.2	11.7	0.7	To Remain
2864	TREE	2018	710.3	76.9	11.3	To Be Removed/Trimmed	4279	TREE	2018	566	15.6	0.8	To Be Removed/Trimmed
2898	TREE	2018	709.5	80.2	10.4	To Be Removed/Trimmed	4280	TREE	2018	572.9	26.1	3.1	To Be Removed/Trimmed
2918	TREE	2018	713.3	74.7	3.9	To Be Removed/Trimmed	4283	TREE	2018	579.1	30	1.7	To Be Removed/Trimmed
2929	TREE	2018	720.5	83.2	0.9	To Be Removed/Trimmed	4302	TREE	2018	588.9	64.2	6.2	To Be Removed/Trimmed
2953	TREE	2018	707.5	80.9	1.1	To Be Removed/Trimmed	4304	TREE	2018	580.6	52.5	0.5	To Be Removed/Trimmed
2959	TREE	2018	723.7	109.7	16.1	To Be Removed/Trimmed	4308	TREE	2018	582.2	51.5	5	To Be Removed/Trimmed
2966	TREE	2018	733.8	83.2	1.5	To Be Removed/Trimmed	4309	TREE	2018	575.6	40.5	5.8	To Be Removed/Trimmed
2967	TREE	2018	737.6	84.9	0.9	To Be Removed/Trimmed	4312	TREE	2018	576.6	44.7	2.5	To Be Removed/Trimmed
2968	TREE	2018	727.3	68.9	0.6	To Be Removed/Trimmed	4313	TREE	2018	575.2	41.3	5.1	To Be Removed/Trimmed

PROJECT

Nashville Int. Airport
Airport Layout Plan

CLIENT

BNA Nashville International Airport

Metropolitan Nashville
Airport Authority

140 BNA Park Drive
Suite 520
615.275.1675 tel
www.flynashville.com

CONSULTANT

AECOM

AECOM Technical Services Inc.
1700 Market Street
Suite 1600
Philadelphia, Pennsylvania 19103
215.399.4300 tel
www.aecom.com

AECOM Technical Services Inc.
1000 Corporate Center Drive
Suite 250
Franklin, Tennessee 37067
315.771.2480
www.aecom.com

REVISIONS

No.	Revision Description	Done By	Approved By	Date

LEGEND

(green outline)	Dense Vegetation Area

NOTES:

1. FOR CLARITY, DENSE VEGETATION AREAS REPRESENT ONLY HIGHEST AND LOWEST OBJECT WITHIN BOUNDS

2. DEPICTION OF FEATURES AND OBJECTS WITHIN INNER PORTION OF THE APPROACH SURFACES ARE ILLUSTRATED ON THE INNER PORTION OF THE APPROACH SURFACE DRAWINGS

3. PART 77 SURFACES AND RUNWAY END ELEVATIONS ARE IN MSL

4. OUTER PORTION OF THE APPROACH NOT SHOWN DUE TO NO KNOWN OBSTACLES

FAA DISCLAIMER:

1. THE PREPARATION OF THIS DOCUMENT MAY HAVE BEEN SUPPORTED, IN PART, THROUGH A PLANNING GRANT FROM THE FEDERAL AVIATION ADMINISTRATION AS PROVIDED UNDER SECTION 505 OF THE AIRPORT AND AIRWAY IMPROVEMENT ACT OF 1982. THE CONTENTS DO NOT NECESSARILY REFLECT THE OFFICIAL VIEWS OR POLICY OF THE FAA. ACCEPTANCE OF THIS REPORT BY THE FAA DOES NOT IN ANY WAY CONSTITUTE A COMMITMENT ON THE PART OF THE UNITED STATES TO PARTICIPATE IN ANY DEVELOPMENT DEPICTED THEREIN, NOR DOES IT INDICATE THAT THE PROPOSED DEVELOPMENT IS ENVIRONMENTALLY ACCEPTABLE WITH APPROPRIATE PUBLIC LAWS.

2. THE FAA'S APPROVAL OF THIS AIRPORT LAYOUT PLAN (ALP) REPRESENTS ACCEPTANCE OF THE GENERAL LOCATION OF FUTURE FACILITIES DEPICTED. DURING THE PRELIMINARY DESIGN PHASE, THE AIRPORT OWNER SHALL SUBMIT, FOR FAA APPROVAL: FINAL LOCATIONS, HEIGHTS, AND EXTERIOR FINISH OF ALL STRUCTURES. THE FAA'S CONCERNS ARE OBSTRUCTIONS, IMPACT ON ELECTRONIC FACILITIES, AND ADVERSE IMPACT ON CONTROLLER VIEW OF AIRCRAFT APPROACHES AND GROUND MOVEMENT AREAS WHICH COULD ADVERSELY AFFECT THE SAFETY, EFFICIENCY, OR UTILITY OF THE AIRPORT.

3° 53' W ± 0° 21'
Changing by 0° 3' W Per Year
June 7, 2019, NOAA

2,000 1,000 0 2,000 Feet

PROJECT NUMBER

60557445

PL-009
Airport Airspace Drawing

22-FEBRUARY-2021